Air King Ventilation Products®

SPECIFICATIONS
ARAGON GLASS
RANGE HOODS

Barcelon Collection™

Wall Mounted Range Hood, 120 Volts, 2.8 amps, 60 hz.

- **Dimensions**
  Overall bottom projection - 19 11/16"
  Height (less chimney) - 4 11/16"
  Available widths: 36" (35 1/2")
- **Hood Body**
  Brushed stainless steel with tempered glass.
- **Motor**
  3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz., 2.8 amps.
- **Lighting**
  4 - Hi spot ES 16, 50 watt maximum halogen lights.
- **Ducting Options**
  Vertical ducting:6" round duct adapter complete with polymetric back draft damper ensuring quiet operation.
  Ductless: Requiers charcoal filter (not included).
- **Blower Wheel**
  Dual inlet, electronically balanced polymetric centrifugal blower wheel, 5 27/32" width 59 paddles.
- **Mounting**
  Ceiling mounted with included mounting bracket. Install 20" to 30" from cooking surface.
- **Filters**
  Grease Filter: Dishwasher safe, BCGF-01 (included).
  Charcoal Filter: BCCF-01 (not included).
- **Available Finishes**
  Stainless Steel.

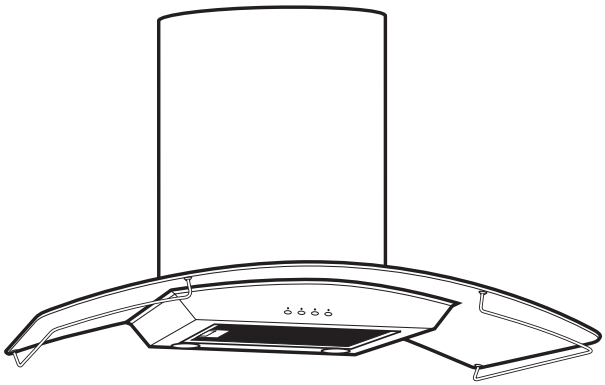

ARA SERIES

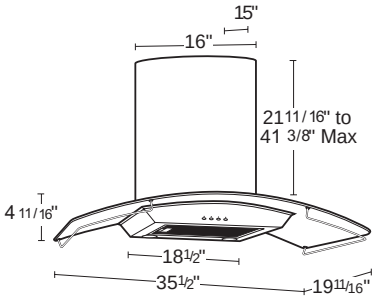

HVI PERFORMANCE

Static Pressure (inches of w.g.)	0	0.1	0.5	0.75	1.0	1.25	1.5	1.75	2.0
CFM	606	600	550	527	498	468	438	388	259
RPM	2533	2522	2560	2859	2986	3064	3145	3187	3221
WATTS	531	524	517	472	452	434	413	399	394

Air-King range hoods are tested by the Air Movement and Control Association (AMCA) in accordance with HVI test standard 916, (Air Flow Test Standard) and HVI test standard 915 (Procedure For Loudness Rating Of Residential Fan Products). The Performance results are certified and verified by the Home Ventilating Institute (HVI).

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL US

2100 HVI CERTIFIED™

an EefaCo. Store
1-877-275-9111