


Air King

Ventilation Products®

SPECIFICATIONS
AK960
 CEILING INSERT HEAT/LIGHT

1500 WATTS Heating, 100 WATTS Lighting, 7 WATTS Night Lighting
 120 Volts, 14.2 amps, 60 hz.

- **GRILL**
 White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place using 2 philips head screws easily removed if necessary, dimensions - 17¹/₈"x9⁷/₈".
- **LIGHT LENS**
 Moonstone glass lens, installed in a flip down lens holder. Secured in place using integral tabs.
- **BLOWER WHEELS**
 Heater blower wheel - one piece metal electronically balanced, 3.7"x2.0" with 28 fins.
- **MOTORS**
 Heater motor - Heavy duty, plug in 2 pole motor. Life time lubrication, thermally protected. Rated 120 volts, 60 hz., 0.90 amps.
- **HEATER HOUSING**
 23 gauge galvanized steel housing. Dimensions 14⁵/₈"x9¹/₈"x5⁷/₈".
- **HEATING ELEMENT**
 Wire coil, secured in place by ceramic "J" shaped hooks and terminated by bolt and nut in cylindrical standoffs. Housed in an all metal enclosure. Rated 1500 watts - 5120 Btu.
- **LAMPING INFORMATION**
 Main lighting - Up to 100 watt incandescent capacity, type A lamp required.
 Night lighting - Up to 7 watt incandescent capacity, type C lamp required.

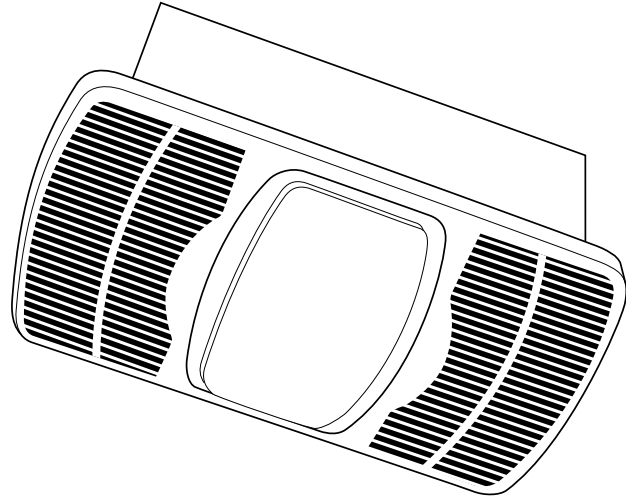

UL/CUL -TYPE IC RATED

- **UNIT MOUNTING**
 Rated Type IC for ceilings insulated to R-40. Designed to mount in ceilings with at least 6" of clearance. The unit will mount between joists (with 16" centers) or butted up against a joist. The housing will mount through drywall thickness up to 3/4", with a rough in opening of 14¹³/₁₆"x 9¹/₄".
- **SINGLE PACK SHIPPING INFO**
 - Box Dim 19"x10¹/₂"x8⁷/₈"
 - UPC 0-8316229610-8 ➤ Shipping Weight - 13 lbs.

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	

