


MODEL 506 & 507 CHAIN OPERATED FANS



Easy-to-install direct discharge fan - no wall switch to wire.

FEATURES

GRILLE:

- Contemporary styled grille complements modern decor

MOTOR:

- Permanently lubricated, thermally protected, plug-in motor
- Motor assembly offers fast, easy "twist-lock" installation

HOUSING:

- Pull chain opens door, turns on fan - no wall switch to wire
- Steel housing finished with rugged electrically-bonded epoxy paint
- Housing adjusts to fit walls from 4½" to 9½" thick

SPECIFICATIONS

MODEL	VOLTS	AMPS	RPM	SONES	CFM
506	120	1.7	1625	8.0	470
507	120	1.5	2050	7.0	250


TYPICAL SPECIFICATION

Ventilator shall be Broan Model 506 (Model 507).

Ventilator shall have steel housing finished with electrically-bonded epoxy paint. Grille to be white polymeric.

Motor assembly shall be removable and permanently lubricated. RPM shall not exceed 1625 (Model 506), (2050 RPM – Model 507).

Air delivery shall be no less than 470 CFM and sound levels no greater than 8.0 Sones (Model 506) (250 CFM and 7.0 Sones – Model 507). All air and sound ratings shall be certified by HVI. Units shall be U.L. listed.

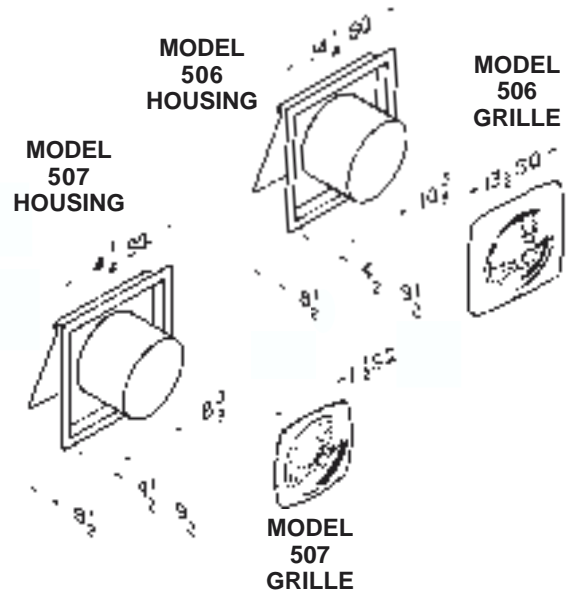

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date