


SPECIFICATION SHEET

MODELS 742SN, 742RB, 742WH DECORATIVE LIGHT / FANS

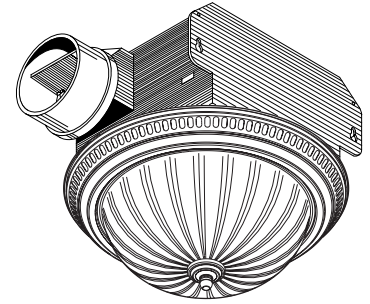

A powerful ventilating fan with the look of an elegant glass light fixture.

FEATURES

LIGHT FIXTURE:

- Corrosion resistant finish
Satin nickel finish (Model 742SN)
Painted white finish (Model 742WH)
Oil-rubbed bronze finish (Model 742BR)
- Frosted melon glass shade
- Close mount design
- Uses two 60 Watt maximum, type A, medium base bulbs. Bulbs not included.
- Vent openings in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

NOTE: For installation in ceilings up to 12/12 pitch.

U.L. Listed for use in insulated ceilings (Type I.C.)

Use supply wiring rated for at least 90° C

SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	1.6	70	2.0	4" Round

TYPICAL SPECIFICATION

Decorative Light/Fan unit shall be Broan Model 742SN (742WH), (742RB).

Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.

Blower assembly shall be removable and have a permanently lubricated motor.

Light fixture assembly shall be plug-in, removable and include a frosted melon glass shade and a corrosion-resistant base with satin nickel (Model 742SN), or painted white (Model 742WH) finish, or oil-rubbed bronze finish (Model 742BR).

Lamps shall be two 60 Watt maximum, type A, medium base, incandescent.


Air delivery to be no less than 70 cfm and sound level no greater than 2.0 sones. Air and sound ratings shall be certified by HVI.

Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-

shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

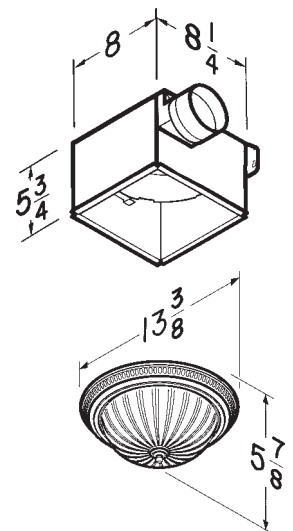

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date