

PLEASE READ BEFORE USE AND SAVE

Ultrasonic
Humidifier
with Ionization

INSTRUCTION MANUAL
MODEL HUNi



an **EefaCo.** Store
1-800-667-8721

SPECIFICATIONS


Power Source	120V/60Hz
Output	160cc +/- 50cc/hr. (Water Temperature 69.8° F)
Power Consumption	26-30W
Applicable Area	200 sq. ft / 18m ²
Misting Time	12 hrs
Tank Capacity	1.8 liters(0.5 gallons)
Mist Type	Ultrasonic
Unit Dimensions	H 10.8 x W 8.7 x D 5.8 inch
Net Weight	3.7 lbs

an *EefaCo.* Store
1-800-667-8721

CONTENTS

Ultrasonic *Humidifier* with Ionization

MODEL HUNi	Before Initial Use	2
	For Your Safety	3
	Parts	4
	Operating Instructions	5
	Maintenance	6
	Trouble Shooting	7
	Specifications	8
	Limited Warranty	9

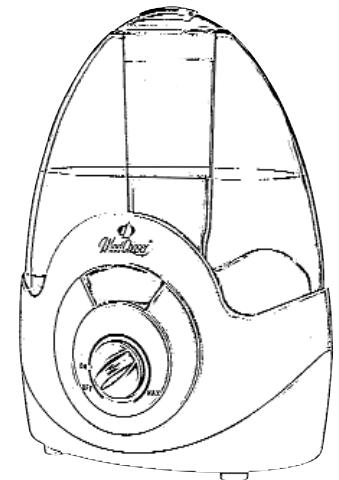

BEFORE INITIAL USE

Read this Entire Instruction Manual Before Use.

Attach your purchase receipt here

PLEASE KEEP YOUR RECEIPT.

YOUR RECEIPT IS YOUR PROOF OF PURCHASE AND IS NECESSARY FOR WARRANTY SERVICE.

For your reference:

Serial No. _____ Date of Purchase _____

Name and Address of Dealer _____

an *EefaCo.* Store
 1-800-667-8721

TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
On/Off Switch is set to On, but the On/Off Indicator Light is off.....	Unit is not plugged in.	Plug in the unit.
	No power at the outlet.	Check circuits, fuses, and test outlet with a tester.
No Mist.....	No water in the tank.	Fill tank with water.
	Unit is not leveled.	Place on a level surface
	Mineral deposits are on the magnetic ring/probe sensor.	Clean the magnetic ring/probe sensor per instructions.
	Water Tank was washed with detergent.	Rinse thoroughly with clean water and dry.
	Blower not operating.	Contact customer service
Condensation forms around the humidifier or windows.....	Nebulizer is not operating properly.	Contact customer service
	Mist intensity is set to high for the room size or preexisting humidity level.	Decrease mist output using the On/Off Switch Knob.
White dust accumulation (due to use of hard water)	Hard water was used (contains too much minerals)	Use purified or distilled water.

MAINTENANCE

Daily Maintenance:


1. Remove the tank cap and drain any water from the water tank. Rinse the water tank with luke warm water after each use. Wipe accessible surfaces of the water tank with a soft cloth.
2. Clean the base and reservoir with a soft damp cloth. Use care when wiping around the Probe Sensor.
3. DO NOT use abrasive cleaners or brushes.
4. DO NOT leave water in the Water Tank when the unit is not in use. This may result in bacteria growth in the reservoir.

Weekly Maintenance:

1. Thoroughly clean humidifier every week using a solution of bleach and water (1 teaspoon of bleach in 1 gallon of water). Fill the tank partially with this solution and let it stand for 20 min. shaking the water tank vigorously every few minutes. Drain and rinse the tank with clean water the bleach smell is gone.
2. Wipe reservoir with a damp cloth thoroughly.
3. If mineral deposits are on the Probe Sensor or transducer and are hard to clean, use a cotton swab that is damped with a solution of 50% white vinegar and 50% water to gently loosen the buildup on the Transducer. DO NOT touch the Transducer with your bare hands.

End of Season Maintenance:

1. At the end of the season, or when the humidifier is not in use for several of days be sure to dry all parts of the unit, including the Water Tank and the Cartridge.
2. Leave the tank cap partially loosened during storage to prevent the tank cap and gasket from sticking together.
3. Clean the tank and base after a long period of storage.

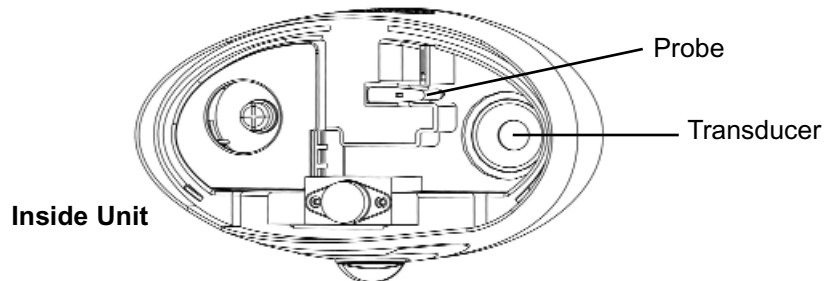

FOR YOUR SAFETY

IMPORTANT INSTRUCTIONS




Read and save these important safety instructions before using this unit. When using electrical appliances, basic safety precautions should always be followed including the following:

- 1) Use this unit only as described in this manual. Other uses not recommended may cause fire or electric shock.
- 2) This product is intended for household use ONLY and not for commercial, industrial or outside use.
- 3) To protect against electrical shock, do not place unit in window, immerse unit, plug or cord in water, or spray with liquids.
- 4) Close supervision is necessary when any appliance is used near children.
- 5) Unplug the unit from the outlet when not in use, when moving from one location to another and before cleaning.
- 6) Do not operate the unit in the presence of explosive and/or flammable fumes.
- 7) Do not place the unit or any parts near an open flame, cooking or other heating appliance.
- 8) Do not operate the unit with a damaged cord, plug, after a malfunction or if dropped or damaged in any manner.
- 9) Avoid contact with moving parts.
- 10) To disconnect, grip the plug and pull it from the wall outlet. Never yank the cord.
- 11) The use of attachments is not recommended and may cause hazards.
- 12) Always use on a dry level surface.
- 13) Do not operate if the unit housing is removed or damaged.
- 14) This appliance has a polarized plug (one blade is wider than the other). To reduce the risk of electric shock, this plug is intended to fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not attempt to defeat this safety feature.
- 15) Do not carry the unit while its operating.
- 16) Do not add any medications into the water tank or reservoir.
- 17) Do not aim Mist Nozzle directly at children, walls, or furniture.
- 18) Do not use hot water or unfiltered tap water. This will cause clogging and damage to misting parts.
- 19) Do not place unit in direct sunlight, high-temperature areas, near computers, or sensitive electronic equipment.
- 20) FOR INDOOR USE ONLY

WARNING: To reduce the risk of fire or electrical shock, DO NOT USE THIS UNIT WITH ANY SOLID STATE SPEED CONTROL DEVICE.

an *Sefa*Co. Store
1-800-667-8721

PARTS

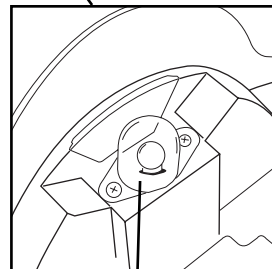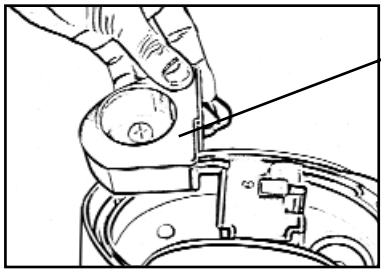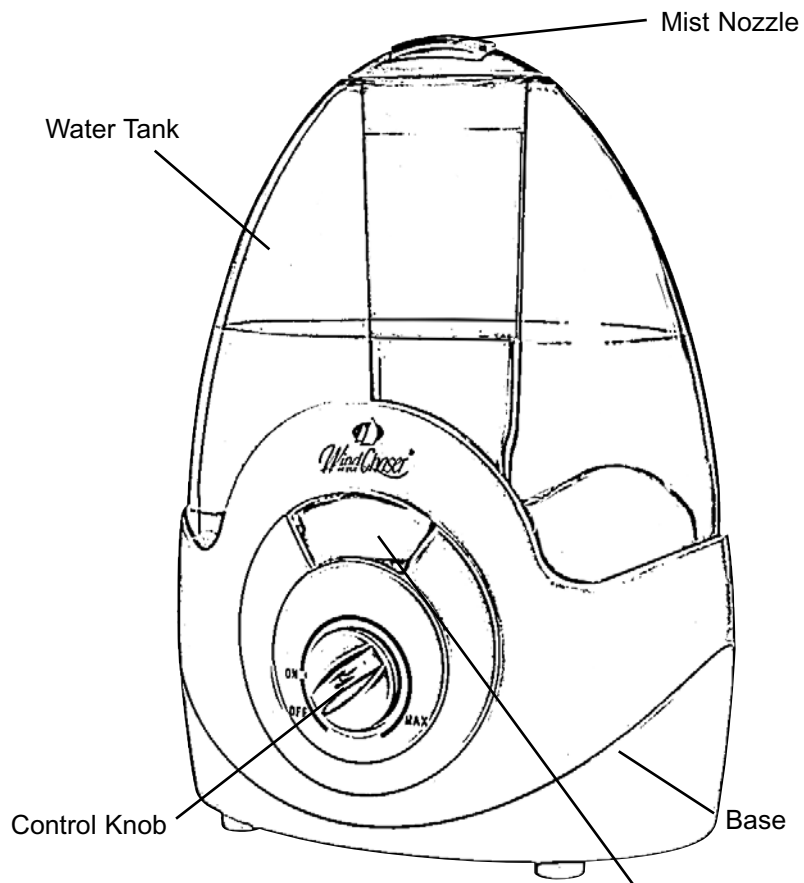

an *EefaCo.* Store
1-800-667-8721

LIMITED WARRANTY

One (1) Year Limited Warranty Terms and Conditions

This warranty applies to repair or replacement if a product is found to be defective in material or workmanship. This warranty does not apply to any damage resulting from commercial, abusive and/or unreasonable use or supplemental damage. Defects as a result of normal wear and tear will not be considered manufacturing defects under this warranty. Read the instruction manual before attempting to use this product. WindChaser Products, Inc. is not liable for incidental or consequential damages of any nature. Any implied warranty of merchantability or fitness for a particular purpose on this product is limited in duration to the duration of this warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you also may have other rights which vary from state to state. This warranty applies only to the original purchaser of this product. WindChaser Products, Inc. will repair or replace this product if it is found to be defective in material and/or workmanship. Defective product should be returned to the place of purchase in accordance with store policy. Thereafter, while within the warranty period, any defective product should be returned to WindChaser Products, Inc.. This warranty does not cover damage resulting from unauthorized attempts to repair or from any use not in accordance with its manual.

an **EefaCo.** Store
1-800-667-8721

OPERATING INSTRUCTIONS

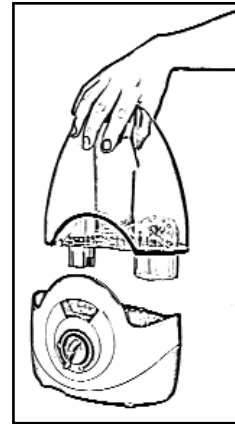


Fig.2

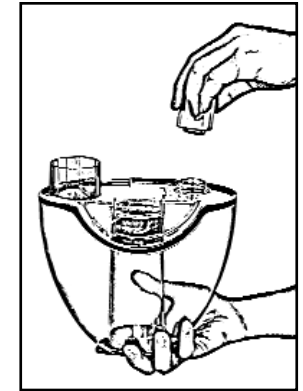


Fig.3

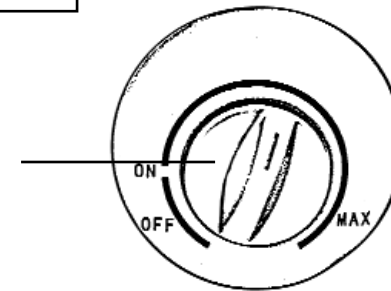


Fig.4

1. Handle the water tank firmly and remove it from the base (fig. 2).
2. Remove the tank cap as well as the Mist Nozzle from the water tank by turning it counter-clockwise (fig. 3) Fill the water tank with purified water. After filling the water tank with water screw back in the tank cap firmly.
3. Steadily put the water tank in the base.
4. To turn the unit On, turn the Control Switch clockwise from Off to On, then the indicating light will illuminate. To turn the unit off, turn the Control Switch counter-clockwise to the Off position and the indicating light will shut-off (fig. 4).
5. The mist volume can be adjusted by turning the Control Switch clockwise from Min. to Max (fig. 4). Misting will not take immediate effect until the reservoir is filled.

IMPORTANT:

Misting will stop when water tank is empty.

FOR REPLACEMENT FILTER PLEASE CONTACT WINDCHASER PRODUCTS CUSTOMER SERVICE AT custserv@windchaserproducts.com.