

5 - Blade Traditional Style Model

FP7500 Series - Traditional, 5 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades - Palm/Bamboo (18° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7500AB - Antique Brass	ISP4 - 22" Narrow Oval Palm	52"	14"	14½"	90 / 65 / 40
FP7500MW - Matte White	ISP5 - 18" Narrow Oval Palm	44"	14"	14½"	120 / 95 / 50
FP7500RS - Rust (Damp)	ISD4A - 22" Narrow Oval Bamboo	52"	14"	14½"	95 / 70 / 40
220V Models					
FP7500AB-220 - Antique Brass	ISP4 - 22" Narrow Oval Palm	52"	14"	14½"	90 / 65 / 40
FP7500RS-220 - Rust (Damp)	ISD4A - 22" Narrow Oval Bamboo	52"	14"	14½"	90 / 70 / 40

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

FAN SPEEDS:

Pull-chain, 3 fan speeds with reversing switch (on switch cup housing). Speeds will vary depending on blade size and type.

CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, www.fanimation.com for more control options.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our web site, www.fanimation.com for more lighting options.

DOWNROD OPTIONS:

The fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52". Call tech support for more information.

BLADE SETS:


A set of 5 Palm or Bamboo blades are included.

DAMP LOCATION:

Rust finish model with bamboo blades is rated for Damp Location.

The Windpointe®

UNI-PACK SERIES FANS FP7300 / FP7400 / FP7500

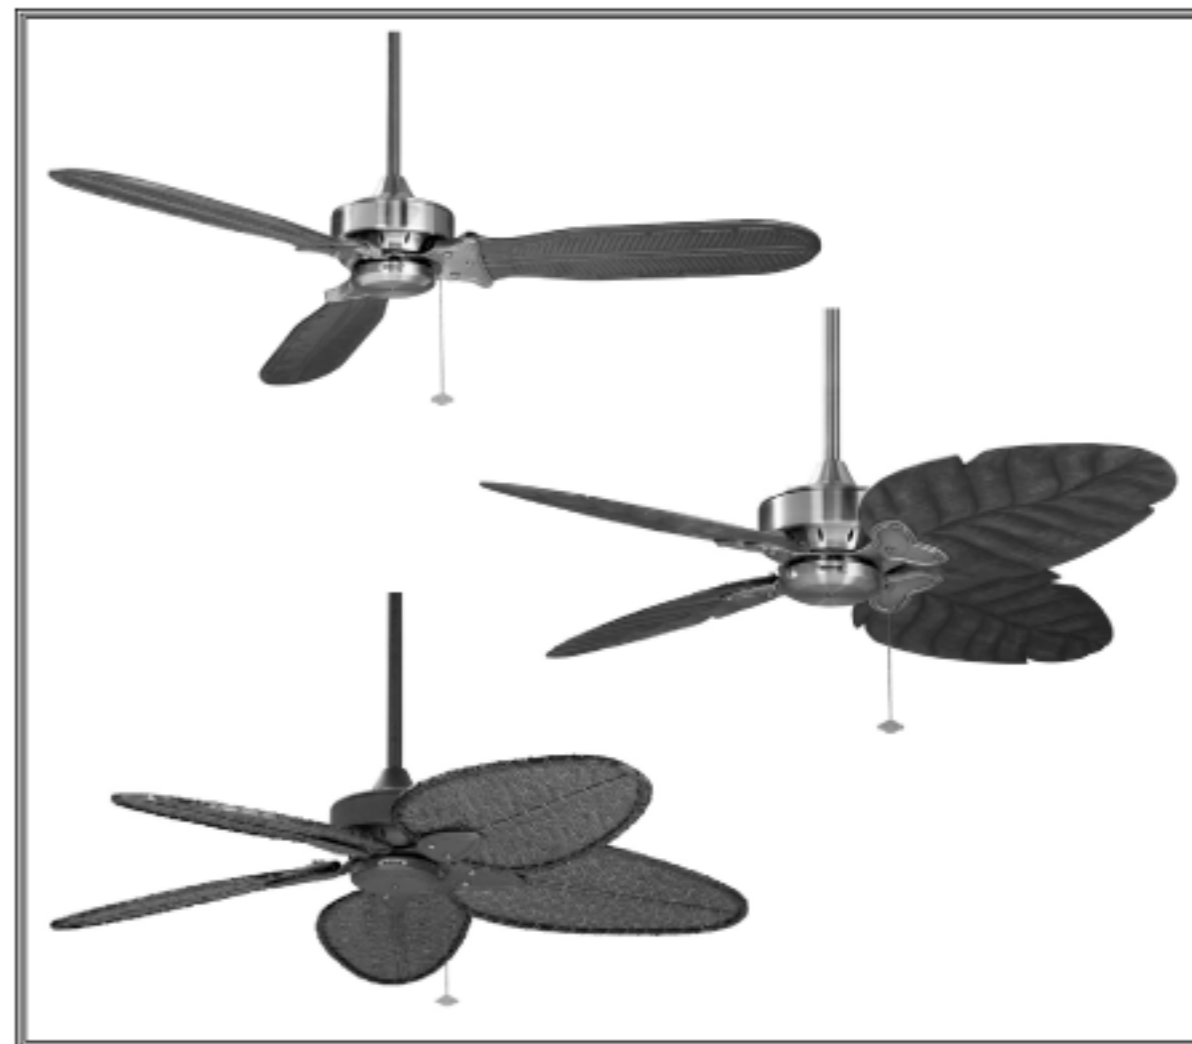

SPECIFICATION SHEET

an *EefaCo.* Store
1-800-667-8721




10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com



2008/05

Copyright 2008 Fanimation, Inc.

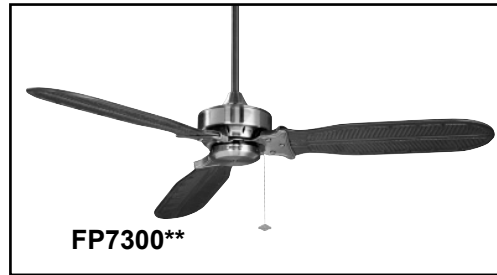

3 – Blade Style Model

FP7300 Series – 3 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades (14° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7300PW – Pewter	B2000CP – Wood	60°	13½"	14½"	125 / 95 / 60
FP7300RS – Rust (Damp)	B3000BW – Wide Oval, Woven	56°	15"	14½"	120 / 95 / 50
220V Model					
FP7300RS-220 – Rust (Damp)	B3000BW – Wide Oval, Woven	56°	15"	14½"	120 / 85 / 50

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

FAN SPEEDS:

Pull-chain, 3 fan speeds with reversing switch (on switch cup housing). Speeds will vary depending on blade size and type.

CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, www.fanimation.com for more control options.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our web site, www.fanimation.com for more lighting options.

DOWNROD OPTIONS:

The fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 3 blades are included.

DAMP LOCATION:

Rust finish model with woven blades is rated for Damp Location.



4 – Blade Style Model

FP7400 Series – Wood, 4 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades - Wood (14° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7400AB – Antique Brass	B4010CP – Cairo Purple Wood	52°	14"	14½"	175 / 120 / 70
FP7400RS – Rust	B4020SS – Sambel Sand Wood	52°	14"	14½"	160 / 110 / 65
220V Model					
FP7400RS-220 – Rust	B4020SS – Sambel Sand Wood	52°	14"	14½"	160 / 110 / 65

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

FAN SPEEDS:

Pull-chain, 3 fan speeds with reversing switch (on switch cup housing). Speeds will vary depending on blade size and type.

CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, www.fanimation.com for more control options.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our web site, www.fanimation.com for more lighting options.

DOWNROD OPTIONS:

The fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 4 wood blades are included. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.