



Incandescent


70 CFM Bath Fan/Light

Bath Fan

Type _____
-30
PV009

Catalog No.	Finish White	Lamping	Capacity	Sones	Volts	Amps	Dimensions (Inches)		
							A	B	C
PV009	-30	1(m) 75w CFL	70 CFM	3.5	120v	1.8a	7-7/8	14	5-3/4

Ceiling opening 6"

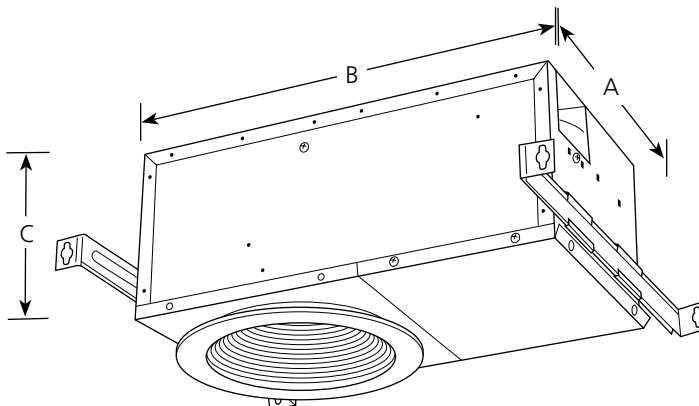

Specifications:

Trim

- One piece aluminum baffle
- Painted finish
- Spring retention for snug fit

Housing

- Mounts to ceiling joists, or in suspended ceilings
- Galvanized steel
- 26 gage
- Mounting brackets with holes for ceiling wires
- Removable wiring cover for easy connections
- Internal wiring plate allows either top or side hole for conduit or BX fitter
- No KO's to remove
- Tapered sleeve polymeric 4" round duct fitting for positive connection
- Quiet polymeric damper to prevent cold backdrafts with no metallic clatter

Motor

- 120 volt, 1.15 amp, permanently lubricated
- Plug in for ease of servicing
- Snaps in or out for ease of cleaning and servicing – no screws
- Specially designed polymeric blower wheel

Lamping

- One 75 watt lamp
- Medium based socket

Labeling

- UL-CUL listed.
- UL listed for use in insulated ceilings (IC listing)
- Air and Sound ratings are certified by HVI

Note: HVI-2100 certified ratings comply with current testing technologies and procedures by the Home Ventilating Institute for off the shelf products that are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state of the art test laboratory. Sones are a measure of humanly perceived loudness based on laboratory tests.